

CAST IRON WHEELS








CAST IRON WHEELS

Made of cast iron, Round tread
 Lacquered colour: silver and black and so on
 With ball bearing and grease nipple
 Diameter range: 150–250mm

High abrasion resistance
 Low rolling resistance
 Temperature range: -40°C +140°C
 Load capacity: 600–1400kgs








SERIES					
CIRB-150/45-20B	150	45	60	20	600
CIRB-160/50-20B	160	50	60	20	800
CIRB-200/45-20B	200	45	60	20	1000
CIRB-250/54-20B	250	54	60	20	1400

CAST IRON WHEELS

Made of cast iron, Round tread
 Lacquered colour: silver and black and so on
 With Roller bearing and grease nipple
 Diameter range: 100–250mm

High abrasion resistance
 Low rolling resistance
 Temperature range: -40°C +140°C
 Load capacity: 300–1400kgs



SERIES					
CITT-100/38R	100	38	45	20	300
CITT-150/45R	150	45	60	31.5	600
CITT-200/45R	200	45	60	31.5	1100
CITT-250/54R	250	54	60	36.5	1400



CAST IRON WHEELS

Made of cast iron, Flat tread

Lacquered colour: silver and black and so on

With plain, roller bearing






Diameter range: 3–12in

High abrasion resistance

Low rolling resistance

Temperature range: -40°C $+140^{\circ}\text{C}$

Load capacity: 250–2500lbs







SERIES					
CIFR-03/14R	3	1-1/4	1-9/16	1/2	250
CIFR-03/15R	3	1-1/2	1/5/8	1-3/16	400
CIFR-34/20R	3-1/4	2	2-3/16	1-3/16	700
CIFR-04/14R	4	1-1/4	1-9/16	1/2	300
CIFR-04/14LR	4	1-1/4	1-13/16	1/2	300
CIFR-04/15R	4	1-1/2	1/5/8	1-3/16	600
CIFR-04/20R	4	2	2-3/16	1-3/16	700
CIFR-05/14R	5	1-1/4	1-9/16	1/2	350
CIFR-05/15R	5	1-1/2	1/5/8	1-3/16	600
CIFR-05/20R	5	2	2-3/16	1-3/16	1000
CIFR-06/15R	6	1-1/2	1/5/8	1-3/16	700
CIFR-06/20R	6	2	2-3/16	1-3/16	1200
CIFR-06/25AR	6	2-1/2	2-3/4	1-3/16	1500
CIFR-06/25R	6	2-1/2	2-3/4	1-15/16	1600
CIFR-06/30R	6	3	3-1/4	1-15/16	2000
CIFR-08/20R	8	2	2-3/16	1-3/16	1400
CIFR-08/25R	8	2-1/2	2-3/4	1-15/16	1700
CIFR-08/25CR	8	2-1/2	3-1/4	1-15/16	1700
CIFR-10/25AR	10	2-1/2	2-3/4	1-3/16	1900
CIFR-12/25R	12	2-1/2	2-3/4	1-15/16	2000
CIFR-12/30R	12	3	3-1/4	1-15/16	2500

V-GROOVE CAST IRON WHEELS

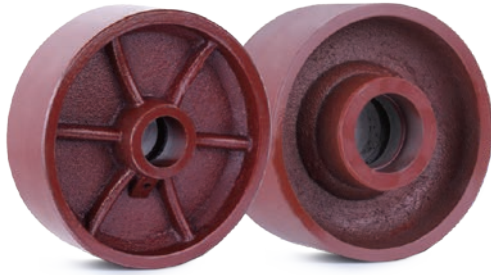
Made of cast iron, V-Groove tread
 Lacquered colour: silver and black and so on
 With plain, roller bearing
 Diameter range: 3–10in

High abrasion resistance
 Low rolling resistance
 Temperature range: -40°C +140°C
 Load capacity: 300–4000lbs








SERIES						
CIVG-03/14R	3	1-1/4	1-9/16	7/8	1/2	300
CIVG-04/15R	4	1-1/2	1-5/8	7/8	1-3/16	600
CIVG-04/20R	4	2	2-3/16	7/8	1-3/16	800
CIVG-05/20R	5	2	2-3/16	7/8	1-3/16	900
CIVG-06/20R	6	2	2-3/16	7/8	1-3/16	1000
CIVG-06/20R	6	2-1/2	2-3/4	7/8	1-15/16	2400
CIVG-06/20WR	6	2-1/2	2-3/4	1-3/8	1-15/16	2400
CIVG-06/30R	6	3	3-1/4	7/8	1-15/16	3300
CIVG-06/30WR	6	3	3-1/4	1-3/8	1-15/16	3300
CIVG-08/20R	8	2	2-3/16	7/8	1-3/16	1200
CIVG-08/25R	8	2-1/2	2-3/4	7/8	1-15/16	2500
CIVG-08/25WR	8	2-1/2	2-3/4	1-3/8	1-15/16	2500
CIVG-08/30R	8	3	3-1/4	7/8	1-15/16	3500
CIVG-08/30WR	8	3	3-1/4	1-3/8	1-15/16	3500
CIVG-10/30R	10	3	3-1/4	7/8	1-15/16	4000
CIVG-10/30WR	10	3	3-1/4	1-3/8	1-15/16	4000

DUCTILE IRON WHEELS



Made of ductile iron, machined tread
 Lacquered colour: as per request
 With plain, roller bearing
 Diameter range: 4-12in

High abrasion resistance
 Low rolling resistance
 Temperature range: -40°C +140°C
 Load capacity: 1000-7000lbs







SERIES					
DSTO-04/15R	4	1-9/16	2	1-3/16	1000
DSTO-04/20R	4	2	2-3/16	1-3/16	1500
DSTO-05/20R	5	2	2-3/16	1-3/16	1600
DSTO-05/25R	5	2-1/2	2-3/4	1-15/16	2000
DSTO-06/20R	6	2	2-3/16	1-3/16	1900
DSTO-06/25R	6	2-1/2	2-3/4	1-15/16	3400
DSTO-06/25CR	6	2-1/2	3-1/4	1-15/16	3400
DSTO-06/30R	6	3	3-1/4	1-15/16	4800
DSTO-08/20R	8	2	2-3/16	1-3/16	2000
DSTO-08/25R	8	2-1/2	2-3/4	1-15/16	4000
DSTO-08/25CR	8	2-1/2	3-1/4	1-15/16	4000
DSTO-08/30R	8	3	3-1/4	1-15/16	5600
DSTO-10/25R	10	2-1/2	2-3/4	1-15/16	4500
DSTO-10/30R	10	3	3-1/4	1-15/16	6000
DSTO-12/30R	12	3	3-1/4	1-15/16	6500
DSTO-12/40R	12	4	4-1/4	2-7/16	7000

V-GROOVE CAST IRON WHEELS

Made of ductile iron, V-Groove trade
 Lacquered colour: as per request
 With plain, roller bearing
 Diameter range: 4–10in

High abrasion resistance
 Low rolling resistance
 Temperature range: -40°C +140°C
 Load capacity: 1400–7000lbs



SERIES						
DSVG-04/20R	4	2	2-3/16	7/8	1-3/16	1400
DSVG-06/20R	6	2	2-3/16	7/8	1-3/16	1800
DSVG-06/25R	6	2-1/2	2-3/4	7/8	1-15/16	3400
DSVG-06/25WR	6	2-1/2	2-3/4	1-3/8	1-15/16	3400
DSVG-06/25CR	6	2-1/2	3-1/4	7/8	1-15/16	3400
DSVG-06/25CWR	6	2-1/2	3-1/4	1-3/8	1-15/16	3400
DSVG-06/30R	6	3	3-1/4	7/8	1-15/16	4800
DSVG-06/30WR	6	3	3-1/4	1-3/8	1-15/16	4800
DSVG-08/25CR	8	2-1/2	3-1/4	7/8	1-15/16	3600
DSVG-08/25CWR	8	2-1/2	3-1/4	1-3/8	1-15/16	3600
DSVG-08/30R	8	3	3-1/4	7/8	1-15/16	5000
DSVG-08/30WR	8	3	3-1/4	1-3/8	1-15/16	5000
DSVG-10/30R	10	3	3-1/4	7/8	1-15/16	7000
DSVG-10/30WR	10	3	3-1/4	1-3/8	1-15/16	7000